

nifty



HR10 SELF PROPELLED ACCESS PLATFORM



10m (32ft 10in)
Working height


4.50m (14ft 9in)
Working Outreach

Weight Only 2,130kg
Low cost transportation

Bi-Energy Available
Optimising utilisation

**Fully Proportional
Hydraulic Controls**
Simple, reliable &
easy to maintain

1.50m Chassis
Improving narrow aisle access

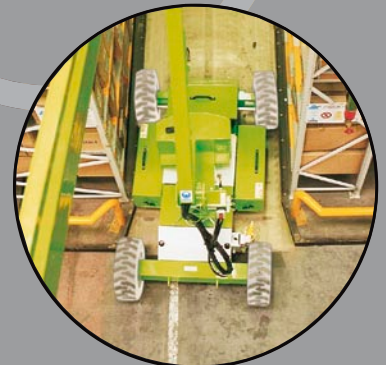

niftylift.com






nifty Height Rider 10

The Nifty **Height Rider 10** provides excellent reach capabilities from a compact and very low weight base. Its narrow chassis allows better access to restricted areas and a tight turning circle means superb manoeuvrability. Transportation is easy due to its low overall weight and a choice of power options makes this an ideal entry machine to the self-propelled market.

SAFETY FEATURES

- Automatic Fail-safe Brakes
- Tilt Alarm
- Foam Filled or Solid Tyres
- Dual Controls (Platform & Base)
- Manual Recovery with Hand Pump
- Dual Harness Points
- Lock Valves on all Hydraulic Cylinders
- CE Mark

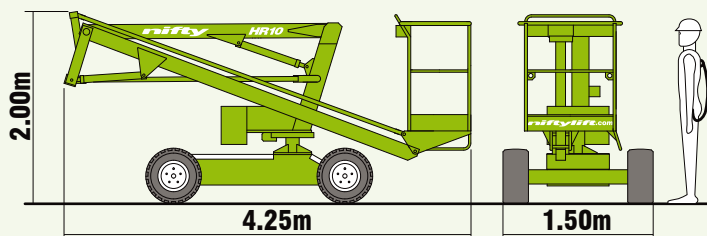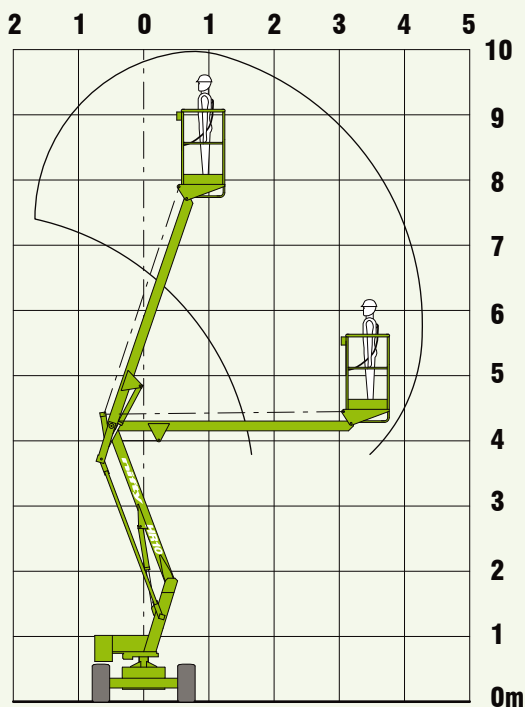

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

The **Height Rider 10's** 1.50m chassis width make it ideal for working in restricted areas such as factories or warehouses.



With fully proportional hydraulic controls, the **Height Rider 10** is easy to operate and simple to maintain, making it ideal for a wide range of applications.

SPECIFICATIONS

| | | |
|--------------------------------|--|-------------------|
| Working Height | 10m | 32ft 10in |
| Platform Height | 8m | 26ft 3in |
| Working Outreach | 4.50m | 14ft 9in |
| Slew | 360° | |
| Width | 1.50m | 4ft 11in |
| Height | 2.00m | 6ft 7in |
| Length | 4.25m | 13ft 11in |
| Minimum Weight | 2,130kg* | 4,700lbs* |
| Turning Radius - Inside | 2.25m | 7ft 5in |
| - Outside | 4.20m | 13ft 9in |
| Platform Capacity | 200kg | 440lbs |
| Platform Size | 1.10m x 0.65m | 3ft 7in x 2ft 2in |
| Drive Speed | 2.1mph | 3.4kph |
| Gradeability | 25% | |
| Control System | Fully proportional hydraulic | |
| Power System | Battery Only Petrol, Diesel or LPG Only Bi-Energy (Engine & Battery) | |

* Weights may vary according to specification / power options, please confirm before ordering.

Supplied by:

Manufacturers of trailer mounted, self propelled and vehicle mounted platforms.

NIFTYLIFT LTD
Fingle Drive
Stonebridge
Milton Keynes
MK13 0ER
England

www.niftylift.com

e.mail: info@niftylift.com

Tel.: +44 (0)1908 223456

Fax.: +44 (0)1908 312733

